

ESC-90

910mm Induction Auto Refill 3 Tier Steam Cabinet



INDUCTION

Specifications

- Power Ratings: 30kW, 41.7A, 50Hz
- 3 Phase Electrical Connection
- Hard wired or fit cable and plug (not supplied)
- 330mm from Left, 81mm from Rear, 560mm from Floor
- Water Inlet: 1/2" threaded BSP male
- Drain 2" BSP male
- Protection Ratings: IPX4
- Working Height: 660mm
- Dimensions: 910 x 810 x 1850H @ 190kg
- Packed Dimensions: 940 x 860 x 2020H @ 203kg

Features

- Ideal for high-volume large-scale Asian style steaming
- 30kW induction produces steam within 5 minutes of startup
- Three tiered cabinets with total max load of 14kg
- Gasket sealed door to lock in steam more effectively
- Automatic water refill mechanism for easy operation
- Lower ambient heat for a more comfortable kitchen
- 90%+ thermal efficiency results in lower energy costs
- Safer than gas with zero carbon emissions or combustion
- Durable, versatile, and easy to clean and service
- AISI grade stainless used in all external panels
- High quality engineering and craftsmanship throughout
- Isolated bottom ensured user safety at all times

Steam Cabinet


- 30kW rapid induction high-frequency coil technology
- 8 level heat settings with LED visual power display
- 3 gasket sealed door cabinets with locking handles
- Multiple rack positions within each cabinet section
- Control steam volumes released into individual sections
- Automatic water-refill float mechanism

Water Treatment

- Pentair Claris N Filter supplied
- Reverse Osmosis (RO) is highly recommended in areas with high chloride content

Warranty

- 1 Year Included + 1 Year Extendable upon registration

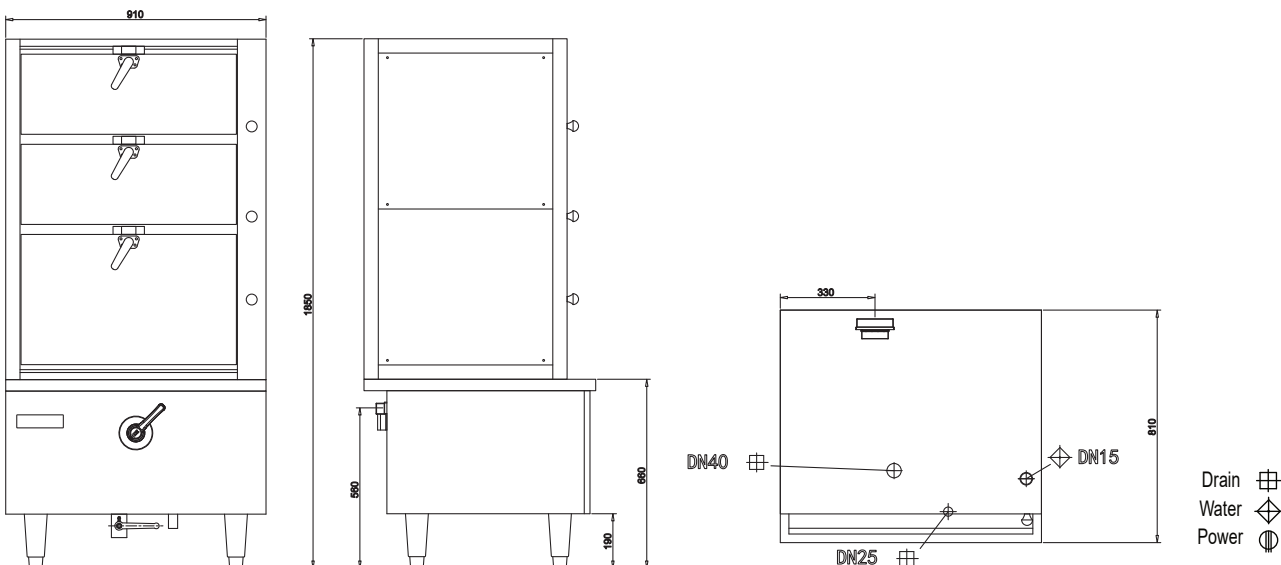

Must be installed by an authorised person in accordance with AS/NZS 3000.

Please note that specifications or design may be altered at any time without notice.

Luus Industries Pty Ltd | +61 3 9240 6822 | sales@luus.com.au | www.luus.com.au



1 YEAR INCLUDED, 1 YEAR EXTENDABLE UPON REGISTRATION