

GTS-6

600mm Griddle Toasters



PROFESSIONAL

Specifications

- NAT Gas: 46 MJ/h, LP Gas: 46 MJ/h
- Supplied with gas regulator (specify NAT or LP on order)
- Gas Inlet: 3/4" BSP Male
- 180mm from Right, 70mm from Rear, 150mm from Floor
- Working Height: 900mm
- Dimensions: 600 x 800 x 1100H @ 100kg
- Packed Dimensions: 640 x 860 x 1260H @ 120kg
- Heavy duty construction with 304 stainless steel panels
- Stainless steel feet with 55mm height adjustment range

Griddle

- 23 MJ/h output per burner
- Stainless steel tube burners with pilot, FFD and piezo ignition
- Variable flame control valve with low flame setting
- 21mm thick mild steel griddle plate
- Top weld sealed hot plate sections
- Griddle cooking area: 590mm x 540mm; 3186 cm²
- 2mm 304 stainless steel splash guards
- Incorporated waste channel at front of plate
- Stainless steel griddle drawer oil bin

Toaster

- Stainless steel reflectors directing heat to toasting zone
- Multiple (3) toasting rack positions
- Toasting rack: 440mm x 385mm
- Stainless steel crumb catcher attached to rack
- Optimal toasting results with burner on 'high' setting
- Lower flame settings ideal for melts/warming
- Secondary crumb tray at base of toaster

Cleaning & Servicing


- Easy access to all parts and components from front
- Removable toaster rack tray, catcher, and supports

Options/Accessories

- Rear Castors (rigid)
- Front Castors (swivel with brakes)
- Ribbed or chrome finish on griddle plate
- Joining caps
- LH & RH side shields

Warranty

- 1 Year Included + 1 Year Extendable upon registration

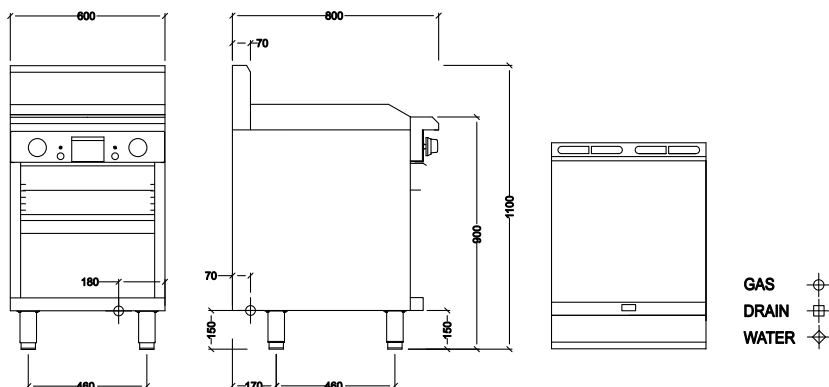

Must be installed by an authorised person in accordance with AS/NZS 5601

Please note that specifications or design may be altered at any time without notice

Luus Industries Pty Ltd | +61 3 9240 6822 | sales@luus.com.au | www.luus.com.au



1 YEAR INCLUDED 1 YEAR EXTENDABLE UPON REGISTRATION