

# NC-60-A

600mm 6 Baskets & 2 x 8L Soup Pots Gas Noodle Cooker



## Specifications

- NAT Gas: 78 MJ/h, LP Gas: 78 MJ/h
- Supplied with gas regulator (specify NAT or LP on order)
- Gas Inlet: 3/4" BSP Male
- 180mm from Right, 70mm from Rear, 150mm from Floor
- Water Inlet: 1/2" Stainless steel corrugated tube
- 60mm from Left, 70mm from Rear, 80mm from Floor
- Drain: 1" ID Hose
- 300mm from Left, 210mm from Front, 220mm from Floor
- Working Height: 900mm
- Dimensions: 600 x 800 x 1100H @ 84kg
- Packed Dimensions: 640 x 860 x 1260H @ 104kg
- Heavy duty construction with 304 stainless steel panels
- Stainless steel feet with 55mm height adjustment range

## Noodle Cooker

- 78 MJ/h jet burner with pilot, FFD and piezo ignition
- Adjustable thermostat accurately controls water temperature
- Water purifying overflow system to remove excess starch
- High temperature cut-out safety mechanism
- Marine grade 316 stainless steel tank
- Fiberfrax Durablanket insulation on both sides of tank
- 50 litre tank capacity
- Stainless steel tank filter and basket seat
- Rear laundry arm with controls located on front panel
- Includes 6 stainless steel mesh baskets & 2 x 8L soup pots
- Safety release tank drainage valve at bottom of unit

## Cleaning & Servicing


- Easy access to all parts & components from front
- Removable baskets, seat and tank filter

## Options/Accessories

- Rear Castors (rigid)
- Front Castors (swivel with brakes)
- Joining caps
- LH & RH side shields

## Warranty

- 1 Year Included + 1 Year Extendable upon registration

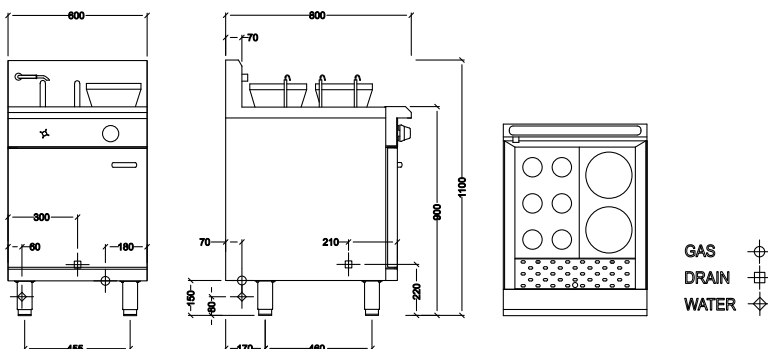

Must be installed by an authorised person in accordance with AS/NZS 3000.

Please note that specifications or design may be altered at any time without notice.

Luus Industries Pty Ltd | +61 3 9240 6822 | sales@luus.com.au | www.luus.com.au

